


AMISO SOLAR

150—210W

Standard 36 Cells Crystalline PV Module



Product Feature



9 Busbar Solar Cell

9 busbar solar cell adopts new technology to improve the efficiency of modules



High Voltage

UL and IEC 1500V certified; lowers BOS costs and yields better LCOE



High Efficiency

Higher module conversion efficiency (up to 20.37%) benefit from half cell structure (low resistance characteristic)



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment




Durability of extreme conditions

High salt mist and ammonia resistance certified by TUV NORD



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

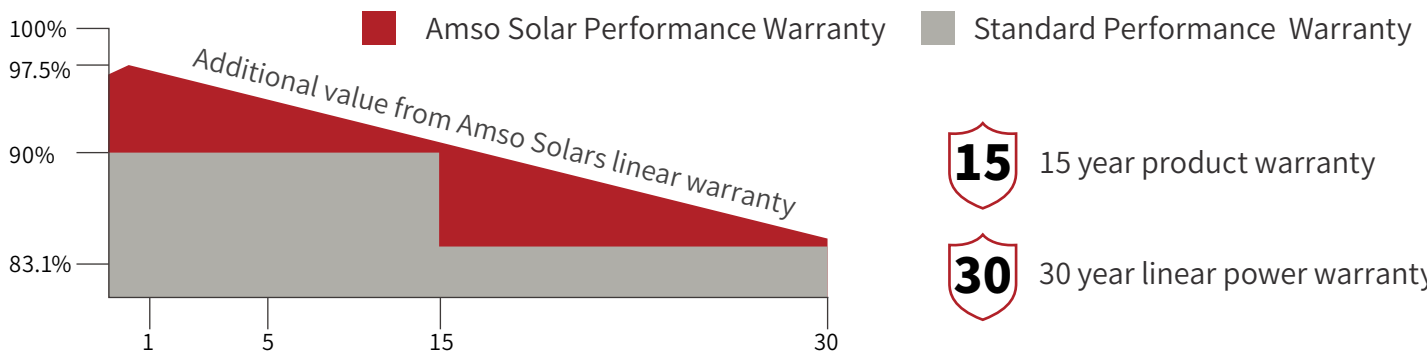


Mono Crystalline Essential Parameter (STC 1000W/M Module Temperature 25°C A.M.1.5)

Model Type	AS150W-M6	AS160W-M6	AS170W-M6	AS180W-M6	AS190W-M6	AS200W-M6	AS210W-M6
Power(w)	150	160	170	180	190	200	210
Number of Cells	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)
Dimensions(MM)	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30
Weight(KG)	11	11	11	11	11	11	11
Vmp(v)	18.0	18.2	18.5	19.0	19.4	19.8	20.2
Imp (A)	8.33	8.79	9.19	9.47	9.79	10.1	10.4
Voc(v)	21.8	22.3	22.8	23.5	23.8	24.1	23.4
Isc(A)	9.18	9.57	9.75	9.82	10.17	10.51	11.36
Module Efficiency	15.1%	16.1%	17.1%	18.2%	19.2%	20.2%	21.2%

Mono Crystalline Essential Parameter (NOCT 800W/M Environment Temperature 20°C A.M.1.5)

Model Type	AS150W-M6	AS160W-M6	AS170W-M6	AS180W-M6	AS190W-M6	AS200W-M6	AS210W-M6
Power(w)	115.24	122.92	130.60	138.28	145.96	153.65	161.33
Number of Cells	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)	36 (4*9)
Dimensions(MM)	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30	1480*670*30
Weight(KG)	11	11	11	11	11	11	11
Vmp(v)	16.41	16.59	16.86	17.32	17.69	18.05	18.41
Imp (A)	7.02	7.41	7.74	7.98	8.25	8.51	8.76
Voc(v)	20.13	20.59	21.05	21.70	21.98	22.25	21.61
Isc(A)	7.80	8.13	8.28	8.35	8.64	8.93	9.66
Module Efficiency	15.1%	16.1%	17.1%	18.2%	19.2%	20.2%	21.2%

Mechanical Drawings

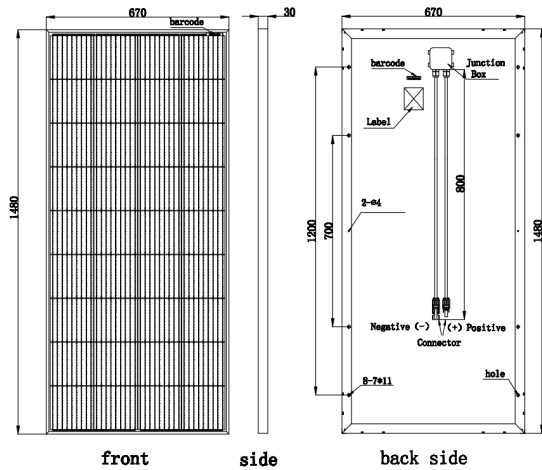

Mechanical Characteristics

Front	Glass 3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP65/IP67 rated
Connectors	MC4 compatible

Temperature Rating

Rated battery operating temperature	45±2°C
Maximum power temperature coefficient	-0.4%/°C
Open circuit voltage temperature coefficient	-0.29%/°C
Short circuit current temperature coefficient	-0.05%/°C

Limit parameter

Operating temperature	-40-+85°C
Maximum system voltage	1000/1500VDC
Maximum fuse rated current	15A

Packing Configuration

Container	20'HQ	40'HQ
Pallets per container	14	48
Pieces per container	616	1728

CONTACT INFORMATION

Address: Rm 1603, 99 Zhongshan Rd, Nanjing, China
Tel: 0086-025-85562529

E-mail: info@amsosolar.com
Mobile Phone: 0086-13814007208

CONTACT US!